

AL Floor Standing



Technical Specifications



Model			JASA-FI-H24A4/AL	JASA-FI-H36A4/ALI	JASA-FI-H60A5/AL	JASA-FI-H96A5/AL
			Fixed Speed	Inverter 	Fixed Speed	Inverter 
Power Supply		V~,Hz,Ph	220~240,50,1	220~240,50,1	380~415,50,3	380~415,50,3
Capacity	Cooling	W	7500	10550	15500	28100
	Heating	W	8100	10850	17500	30000
Performance		EER/COP	3.00/3.45	3.15/3.68	2.65/3.18	2.44/3.00
Electric Data	Rated Cooling Power Input	W	2500	3350	5850	11500
	Rated Heating Power Input	W	2350	2950	5500	10000
	Rated Cooling Current	A	11.40	15.50	11.35	19.70
	Rated Heating Current	A	10.80	15.00	11.60	17.10
Indoor	Indoor Air Flow	m/h	1200/1100/1000/850	1850/1700/1550/1400	1850/1700/1550/1400	4000
	Noise Level	dB(A)	46/44/41/37	52/50/48/45	54/52/49/47	63/60/57
	Outline Dimension (Φ×D)	mm	507×1770×320	587×1882×394	587×1882×394	1200×1850×400
	Package Dimension (W×H×D)	mm	623×1988×440	738×2153×545	738×2153×545	1363×2013×513
	Weight Net/Gross	kg	40.0/52.0	58.0/80.5	59.0/81.5	129.0/141.0
Outdoor	Noise Level	dB(A)	56	63	61	63
	Outline Dimension (W×H×D)	mm	955×396×700	1000×427×746	958×412×1350	940×460×1615
	Package Dimension (W×H×D)	mm	1029×458×750	1077×480×785	1027×443×1395	1038×578×1770
	Weight Net/Gross	kg	60.0/64.5	60.0/65.0	117/127	160/174
Refrigerant Pipe	Refrigerant Type	g	R410A/1700	R410A/2800	R410A/3900	R410A/8000
	Gas	inch	1/4"	1/4"	3/8"	3/8"
	Liquid	inch	5/8"	5/8"	5/8"	7/8"
	Max Length	m	30	30	40	50
	Max Height	m	20	20	30	30

Indoor Dimension			
Model	W	H	D
JASA-FI-H24A4/AL	507	1770	320
JASA-FI-H36A4/AL	587	1882	394
JASA-FI-H60A5/AL	587	1882	394
JASA-FI-H96A5/AL	1200	1850	400

Outdoor Dimension							
Model	A	B	C	D	E	F	G
JASA-FI-H24A4/AL	897	340	700	560	396	965	364
JASA-FI-H36A4/AL	920	370	790	610	427	1003	395
JASA-FI-H60A5/AL	1000	370	1363	620	427	1089	399
JASA-FI-H96A5/AL	940	460	1616	610	530	-	486

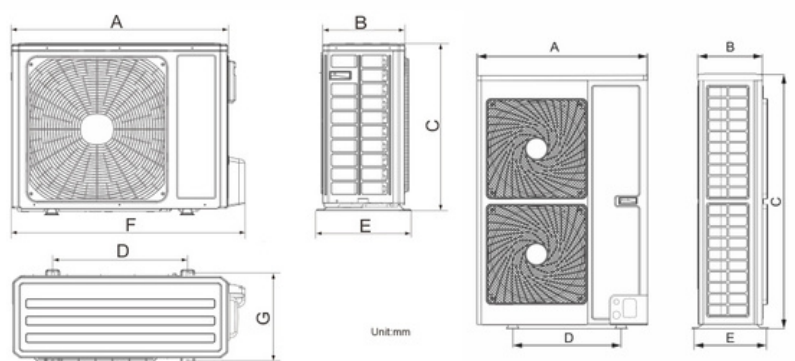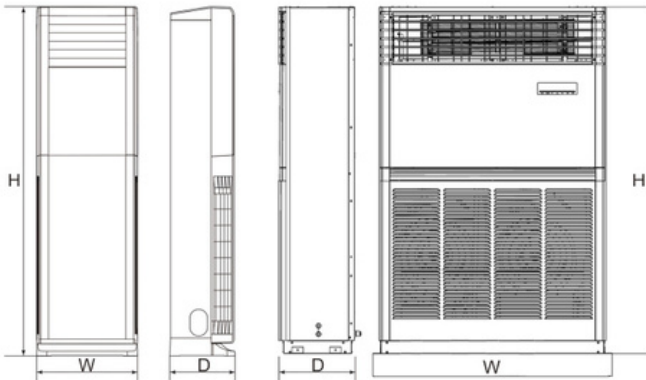

www.aconlinestore.co.za

AC  **online**