

JASA-KD18A / JASA-KD18B / JASA-KD18C



JASA-KD18A



JASA-KD18B



JASA-KD18C

Features:


- High Performance Cooling Pads
- Wired remote controller with running status LCD display
- 9 fan speeds adjustable(single phase models)
- Optimized motor and fan to deliver low noise and powerful airflow
- Auto-clean function available to keep the Cooling Pads clean and prolong the lifetime
- Easy installation and maintenance

Target Applications:


- Factory workshops
- Factory plants
- Supermarkets
- Schools
- Entertainment Centers

SPECIFICATIONS


Model		JASA-KD18A	JASA-KD18B	JASA-KD18C
Air Discharge		Bottom	Side	Top
Nominal Max Airflow	m ³ /h	18000	18000	18000
Voltage/Hertz/Phase	V/Hz/Ph	220-240/50/1	220-240/50/1	220-240/50/1
Power Consumption	KW	1.1	1.1	1.1
Cooling Capacity	KW	43	43	43
Evaporative Efficiency	%	84	80	84
Evaporative Capacity	L/h	65	62	65
Sound pressure Level@1m	dB(A)	68	68	68
Water Tank volume	L	25	35	35
Air Outlet Dimensions	mm	670x670	670x670	735x735
Unit Size(WxDxH)	mm	1100x1100x1000	1190x1100x950	1100x1100x1020
Net Weight	Kg	62	63	66
Running Weight	Kg	95	105	108

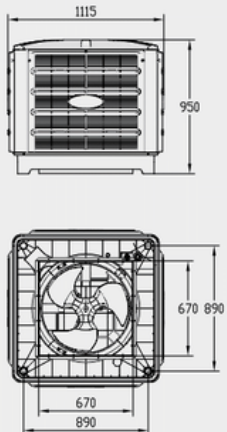

JASA-KD18A

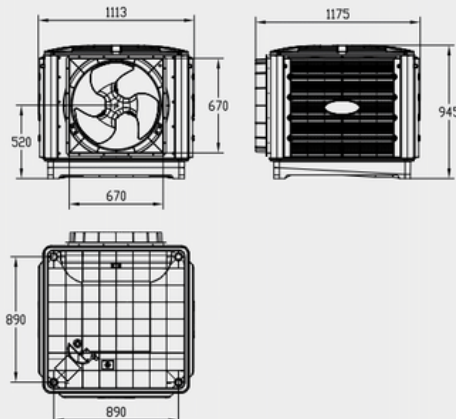

JASA-KD18B

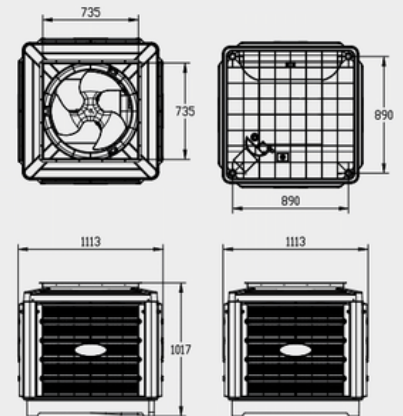

JASA-KD18C